

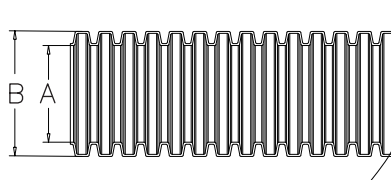


# RCCN 日成HDPE波纹管 Polyethylene Corrugated Tubing

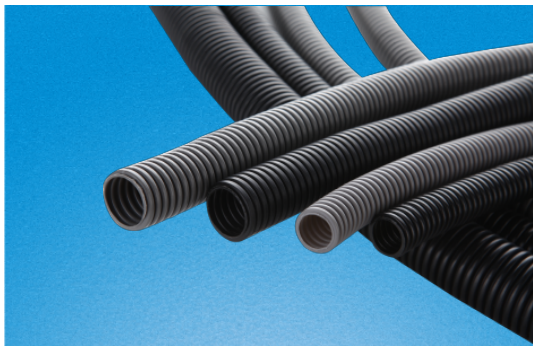

单位/Unit:mm

型号 Item No.		规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black Ral9005	深灰色 Gray Ral7037	Sizes	I.D. A	O.D. B	Stat.r	Dyn.r	Packing M
BG-07B	BG-07G	1/4"	6.5	10.0	15	35	100M
BG-10B	BG-10G	5/16"	10.0	13.0	20	45	100M
BG-12B	BG-12G	-	12.0	15.8	25	55	100M
BG-15B	BG-15G	3/8"	14.3	18.5	35	65	100M
BG-17B	BG-17G	1/2"	17.0	21.2	40	75	100M
BG-23B	BG-23G	3/4"	23.0	28.5	45	100	50M
BG-29B	BG-29G	1"	29.0	34.5	55	120	50M
BG-36B	BG-36G	1 1/4"	36.0	42.5	65	150	50M
BG-48B	BG-48G	2"	48.0	54.5	80	190	25M
BG-08B	BG-08G	9/32"	8.0	11.5	13	25	100M
BG-11B	BG-11G	-	11.0	14.0	20	45	100M
BG-16B	BG-16G	-	14.5	20.0	25	55	100M
BG-20B	BG-20G	-	20.0	25.0	50	85	50M
BG-25B	BG-25G	-	25.5	31.5	50	110	50M
BG-56B	-	-	56.0	68.0	-	-	10M
BG-63B	-	2 1/2"	63.0	74.0	-	-	10M
BG-67B	-	2 1/2"	67.0	80.0	-	-	10M
BG-76B	-	3"	76.0	88.0	-	-	10M
BG-94B	-	4"	94.0	108.0	-	-	10M

材质:HDPE 聚乙烯 (Polyethylene)  
 温度:-30 -100 ,短时110  
 结构:内部和外表均为波浪型。  
 颜色:黑色RAL9005,深灰色RAL7037  
 其它颜色可选购有起订量要求。



产品认证: 欧洲CE, 欧洲环保ROHS, REACH.

特性:表面好的光泽;机械承载强度好;好的柔软性能;  
 用途:可保护电线电缆不受外力磨损及绝缘承载能力:不容易变形,但可以迅速恢复,并且本身无任何损伤。

应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;

使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可。

备注:带\*号为常规备货型号。特殊包装长度有起订量要求,测试温度以日成高低温机测试合格为准,使用需根据现场环境为准。

Material:HDPE (Polyethylene)

Work Temperature:-30 to100 ,110 in short time

Color:black/ral9005,gray/ral7037

Certificates: CE,ROHS,REACH.


Characheristics:good luster of exterior, stronger machinism loading, perfect flexible  
 Functions:insulated,protect cables and wires Loading ability:uneasy to change shape,reshape speedly without hurt body

Where to use:Equipment,machines, electricity sets, and so on

How to use:insert cables or wires to RCCN flexible conduit

Remarks:the items with \* are available in stock.special packing length come with MOQ work temperature tested according to RCCN factory test machines

# RCCN 日成HDPEV0阻燃波纹管 Polyethylene Corrugated Tubing

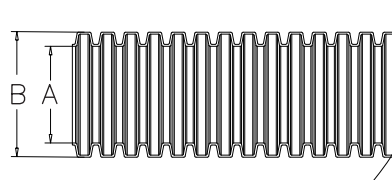

单位/Unit:mm

型号 Item No.		规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black Ral9005	深灰色 Gray Ral7037	Sizes	I.D. A	O.D. B	Stat.r	Dyn.r	Packing M
BG-07BV0	BG-07GV0	1/4"	6.5	10.0	15	35	100M
BG-10BV0	BG-10GV0	5/16"	10.0	13.0	20	45	100M
BG-12BV0	BG-12GV0	-	12.0	15.8	25	55	100M
BG-15BV0	BG-15GV0	3/8"	14.3	18.5	35	65	100M
BG-17BV0	BG-17GV0	1/2"	17.0	21.2	40	75	100M
BG-23BV0	BG-23GV0	3/4"	23.0	28.5	45	100	50M
BG-29BV0	BG-29GV0	1"	29.0	34.5	55	120	50M
BG-36BV0	BG-36GV0	1 1/4"	36.0	42.5	65	150	50M
BG-48BV0	BG-48GV0	2"	48.0	54.5	80	190	25M
BG-08BV0	BG-08GV0	9/32"	8.0	11.5	13	25	100M
BG-11BV0	BG-11GV0	-	11.0	14.0	20	45	100M
BG-16BV0	BG-16GV0	-	14.5	20.0	25	55	100M
BG-20BV0	BG-20GV0	-	20.0	25.0	50	85	50M
BG-25BV0	BG-25GV0	-	25.5	31.5	50	110	50M

材质:HDPE 聚乙烯 (Polyethylene)  
 温度:-30 -100 ,短时110  
 结构:内部和外表均为波浪型。  
 颜色:黑色RAL9005,深灰色RAL7037  
 产品认证: 欧洲CE,ROHS,REACH.

防火等级:94-V0。  
 特性:表面好的光泽;机械承载强度好;好的柔软性能;  
 用途:可保护电线电缆不受外力磨损及绝缘

承载能力:不容易变形,但可以迅速恢复,并且本身无任何损伤。

应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;

使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可。

备注:特殊包装长度有起订量要求,测试温度以日成高低温机测试合格为准,使用需根据现场环境为准。另备环保型阻燃管,有起订量要求。

Material:HDPE (Polyethylene)

Work Temperature:-30 to100 ,110 in short time

Color:Color:black/ral9005,gray/ral7037

Certificates: CE,ROHS

Inflaming retarding rate:V-0

Characheristics:good luster of exterior, stronger machinism loading, perfect flexible

Functions:insulated,protect cables and wires Loading ability:uneasy to change shape,reshape speedly without hurt body

Where to use:Equipment,machines, electricity sets, and so on.

How to use:insert cables or wires to RCCN flexible conduit

Remarks:the items with \* are available in stock. special packing length come with MOQ work temperature tested according to RCCN factory test machines