



# RCCN 日成SOTL型PC板扭线隔离柱STAND-OFF TWIST LOCK

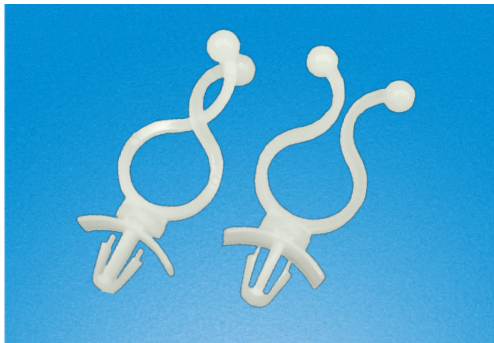


材质：UL合格之NYLON66(本色).  
 防火等级：94V-2，绝缘性佳，不易老化。  
 Material：UL approved NYLON66(natural),  
 Fireproof：94V-2，good insulation, good aging resistant.

单位/Unit:mm


型号	Item No.	间距 Instance A	包装 Packing
SOTL-6-4.8	SOTL-12-4.8	4.8	1000pcs
SOTL-6-12.7	SOTL-12-12.7	12.7	
SOTL-6-19.1	SOTL-12-19.1	19.1	
SOTL-6-25.4	SOTL-12-25.4	25.4	
SOTL-6-31.8	SOTL-12-31.8	31.8	



SOTL-25




底孔径4.8mm  
Bottom hole dia.4.8mm



SOTL-45


# RCCN 日成BHMWS型PC板夹线套 WIRE SADDLE

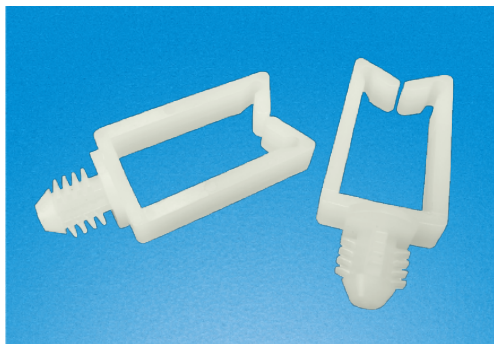

材质：UL合格之NYLON66(本色).  
 防火等级：94V-2，绝缘性佳，不易老化。  
 Material：UL approved NYLON66(natural).  
 Fireproof：94V-2，good insulation, good aging resistant.

单位/Unit:mm

型号	Item No.	间距 Instance A	包装 Packing
BHMWS-13.0	-	13.0	1000pcs
BHMWS-18.3	-	18.3	
BHMWS-27.2	-	27.2	
BHMWS-35.6	-	35.6	



孔径7.9mm  
板厚6.4mm  
Hole dia.7.9mm  
Board thickness 6.4mm

